

# 2007 GMC C6500 Kodiak

# Our Price \$26,900

View this vehicle on our website at truckandry.com

419-899-2020 240 OH-18 , Sherwood, Ohio 43556

Photos Details Contact





# **Specifications:**

Year:	2007
VIN:	1GDJ6E1397F408668
Make:	GMC
Stock:	10564
Model/Trim:	C6500 Kodiak
Condition:	Pre-Owned
Exterior:	Summit White
Engine:	7.8L Isuzu Diesel
Interior:	Gray Cloth
Transmission:	Allison 2200 Series 5 speed automatic
Mileage:	118,748
Drivetrain:	Rear Wheel Drive
Truck Type:	Flatbed

# **Vehicle Description**

2007 GMC C6500 Kodiak powered by the 7.8L Duramax Diesel - RWD - Crew Cab - 12 foot flat bed

- Automatic transmission - Cloth interior - Front and Rear bench seat - Tilt - Cruise - Power windows

- Power locks - Power mirrors

#### **Installed Options Option Packages** Interior **Factory Installed Packages** - Air conditioning not desired - this option should be ordered only when a customer does not require air conditioning DRY-TYPE STANDARD FILTER ELEMENT - Electronic engine hour meter - Engine "Check gauges" telltale light and buzzer, oil pressure gauge ELECTRIC, SELF CONTAINED, 12V - Gauges, low oil pressure and coolant level, high coolant and engine oil temperature \$153 - Headlamp warning buzzer - Interior trim, Very Dark Pewter (Requires 69V Very Dark Pewter Vinyl or 69C Very Dark Pewter Cloth) **AIR CONDITIONING** - Molded vinyl floor covering \$939 - Powerpoints - two in-cab power sources (in addition to optional cigarette lighter) for electrical plug-in accessories SUPPLEMENTAL INFLATABLE RESTRAINTS NOT INCLUDED - Provisions for stereo - Includes AM/FM antenna, lead wiring for speakers, and separate door chime module (N/A with ZQ2 driver convenience package) - Rear bench seat- Seat trim, vinyl, Very Dark Pewter AUTOMATIC ENGINE SHUTDOWN WITH ALARM IS STANDARD - Seat, driver, High-back bucket, Fixed height, manual adjuster - storage in the seat riser -Includes reset feature. \$141 with a small lip at the front to help prevent contents from sliding out - Seat, passenger, High-back bucket, Fixed height, manual back angle adjuster - storage in 22SI, DELCO 130-AMP MAXIMUM the seat riser with a small lip at the front to stop contents from sliding out \$110 - Steering, power - ZF variable ratio power Stepwell storage areas at each door. Includes storage cover - Sunshades, passenger side and driver side, vinvl-covered ALLISON 2200 SERIES (CLOSE RATIO) 5-SPEED - Tachometer with automatic and manual transmissions -with 4th Generation Electronic Controls and \$405 0.71 overdrive. Torque Rating: 550 lb-ft (745 N-- Two sided single common key for doors and ignition m). Available for general use for a Gross Vehicle - Underhood bodybuilder connections accessory power supply - Provides 12V power Weight up to 26,000 lbs. (11,794 kg). and a supply from the battery with two separate 30 amp fused circuits Gross Combinational Weight up to 26,000 lbs. - Vinyl door trim panels - with storage pockets, beverage holders, and reflectors on all four (11,794 kg). doors 5.29:1 Exterior

DUAL, 750 CCA, DELPHI HEAVY-DUTY FREEDOM BS 31-750

### - Bumpers, front steel, painted argent - Bumper thickness 3.9 mm

- Davtime running lamne- Exterior roof drin moldinge- Front mud flane

- Daytime running lamps- Extends root unp mololings- i ront muc hape
- Horn, single electric mounted inside engine compartment
- Integral grille and fenders The grille is the same color as hood with single halogen headlamps. Entry steps under cab doors are based upon fuel tank type
- Mirror, manual, 102" (259 cm) wide load, integral arm, integral convex mirror black molded composite 12" x 7" (30.5cm x 17.8 cm) with 6" x 7" (15.2cm x 17.8cm) convex section
- Paint, solid, lower color, Summit White- Paint, solid, upper color, Summit White
- Positive door stops- Provisions for mounting front license plate- Roof marker lamps
- Windows, Solar-Ray tinted front windows only; excluding rearside and rear window
- Windshield wipers, 2-speed and intermittent, with pulse washers

### Safety

- Air conditioning not desired this option should be ordered only when a customer does not require air conditioning
- Electronic engine hour meter
- Engine "Check gauges" telltale light and buzzer, oil pressure gauge
- Gauges, low oil pressure and coolant level, high coolant and engine oil temperature
- Headlamp warning buzzer
- Interior trim, Very Dark Pewter (Requires 69V Very Dark Pewter Vinyl or 69C Very Dark Pewter Cloth)
- Molded vinyl floor covering
- Powerpoints two in-cab power sources (in addition to optional cigarette lighter) for electrical plug-in accessories
- Provisions for stereo Includes AM/FM antenna, lead wiring for speakers, and separate door chime module (N/A with ZQ2 driver convenience package)
- Rear bench seat- Seat trim, vinyl, Very Dark Pewter
- Seat, driver, High-back bucket, Fixed height, manual adjuster storage in the seat riser with a small lip at the front to help prevent contents from sliding out
- Seat, passenger, High-back bucket, Fixed height, manual back angle adjuster storage in the seat riser with a small lip at the front to stop contents from sliding out
- Steering, power ZF variable ratio power
- Stepwell storage areas at each door. Includes storage cover
- Sunshades, passenger side and driver side, vinyl-covered
- Tachometer with automatic and manual transmissions
- Two sided single common key for doors and ignition
- Underhood bodybuilder connections accessory power supply Provides 12V power supply from the battery with two separate 30 amp fused circuits
- Vinyl door trim panels with storage pockets, beverage holders, and reflectors on all four doors

### Mechanical

- Air cleaner, dry-type standard filter element (Gasoline engines only)
- Alternator, AD244, Delco-Remy 150-amp maximum (Requires gasoline engine)
- Battery, single, 600 CCA, Delphi Freedom 12V. 115-minute reserve capacity @ 27 degrees C, 600 CCA @ -18 degrees C, (Gasoline engines only)
- Brake system, hydraulic, split with 4-channel ABS disc-type Bosch Hydro Max high performance booster, tandem master cylinder provides independent front and rear circuits, front and rear disc Meritor calipers: 15 3/8" (391mm) rotor diameter, 1 1/2" (39.1 mm) rotor thickness with (4) 2 1/2" (70 mm) diameter pistons
- Engine, Vortec 8.1L MD gasoline V8, 295 hp (220 kw) @ 3600 rpm and 440 lb-ft (594 N-m) torque @ 3,200 rpm Maximum engine speed 4000 rpm with KZX air compressor and 4,200 rpm without KZX. Oil Level Sensor: Warning sensor for low oil levels
- Exhaust system, single horizontal driver side mounted inside frame rail, With Gasoline engines, stainless-steel exhaust. With diesel engines, aluminized steel exhaust, oxidation catalyst, diesel particulate filter and exhaust gas cooler.
- Frame, rail, painted semi-gloss black 8mm 80,000 psi (551,600 kPa) yield strength, steel frame, SAE J1392-080XLK steel, dimensions 9 5/8" x 3" x 5/16", section modulus 12.53 cu. in., RBM 1,378,300
- Front axle, 10,000 lbs. (4536 kg) capacity Up to 53 degree turn angle
- Front shock absorber, diameter 1.375" (35mm)
- Front suspension, tapered leaf, 10,000 lbs. (4536 kg) capacity
- Front tire manufacturer code, Goodyear (Requires S4A Goodyear)
- Front tire size, 245/75R22.5G 9350 lbs. (4241 kg) capacity, (With R4A Goodyear, R3C rear premium tread; With R4N Bridgestone R3B front all season tread) (N/A with Michelin)
- Front tire tread, premium highway
- Front wheels, 22.5" x 7.5" (58.9 cm x 19 cm), steel disc Accuride 10-hole, flange nut, hub piloted, 11.25" (28.5 cm) bolt circle, painted Gray (E- Coat), 13,220 lbs. (5996 kg) capacity, (Requires QH4 rear wheel)
- Fuel tank, single, 50-gallon (189.2L) fuel capacity driver side, steel top tread plate, sump, drain and steps under cab on front passenger side. Provides clean back of cab and a black tethered fuel cap with gasoline engines, and a brass tethered fuel cap with diesel engines (N/A with GPG Lo-Pro option) (Requires OH4, RPR or RNN 22.5" wheels)
- Option PTO not required This option should only be ordered when a customer specifically does not require an electric hand throttle for use with power-take-off provisions. (Note: Deletes transmission PTO gear with Allison MTX 2200HS, MTY 2300HS, and MWP 2500HS Series transmissions.)
- Parking brake. hand lever operated transmission mounted drum brake

BOLTED REAR SUSPENSION

¢01

	ΨĽΙ
HYDRAULIC, SPLIT BRAKE SYSTEM -with 4-channel ABS disc-type Bosch Hydro	
Max high performance booster, tandem master cylinder provides independent front and rear	
circuits, front and rear disc Meritor calipers: 15 3/8" (391mm) rotor diameter, 1 1/2" (39.1 mm)	
rotor thickness with (4) 2 1/2" (70 mm) diameter	
pistons	
FRONT, CHROMED STEEL THICKNESS 5/32" (3.9	,
	\$275
HYSTEC STYLE CAB TO FRAME MOUNTS	
	\$102
ISUZU DIESEL 6H 7.8L I6, 215 HP (160 KW) @ 220	0 RPM AND
520 LB-FT TORQUE (705 N-M) @ 1450 RPM	
(Includes KPJ engine shutdown)	\$10,750
DRIVER CONVENIENCE PACKAGE	
-includes N33 tilt-wheel and K34 cruise control	\$223
AIR SUSPENSION, HIGH-BACK -National 2000 Series, manual lumbar,	\$225
"Chugger Snubber", and inboard armrest	ψΖΖΟ
CALIFORNIA STATE REQUIREMENTS	
1250-WATT, 110V	
-Includes protected receptacle on drivers side	\$50
ENGINE EXHAUST BRAKE AND RESTRICTOR	
	\$492
SINGLE HORIZONTAL-DRIVER SIDE MOUNTED IN	ISIDE FRAME
ELECTRIC REMOTE CONTROL, LIGHTED, HEATE CM) WIDE LOAD, INTEGRAL ARM, INTEGRAL COI MIRROR	
	\$254
RAIL, PAINTED SEMI-GLOSS BLACK 8MM-80,000	PSI (551 600
KPA) YIELD STRENGTH	
10,000 LBS. (4536 KG) CAPACITY	
FRONT OIL SEALS WITH CLEAR CAPS	
Includes synthetic lubricant	\$21
STABILIZER BAR	
	\$141
TAPERED LEAF, 10,000 LBS. (4536 KG) CAPACITY	(
295/75R22.5G-12,350 LBS. (5602 KG) CAPACITY	\$230
	<b>\$200</b>

22.5" X 8.25" (58.9 CM X 21 CM), STEEL DISC

DUAL, 100-GALLON (380L) TOTAL FUEL CAPACITY

**\***~~~

- Rear axle ratio, 6.50:1 (Requires HD1 or HPK single speed rear axle)
- Rear axle, single-speed, Dana S16-130-S, 15,000 lbs. (6804 kg) capacity 40,000 lbs. (18,144 kg) GCWR
- Rear suspension, multi-leaf, 15,000 lbs. (6804 kg) capacity (Requires HD1 single speed rear axle)
- Rear tire manufacturer code, Goodyear (Requires R4A Goodyear)
- Rear tire size, 245/75R22.5G 17,640 lbs. (8001 kg) capacity (With S4A Goodyear, S3C rear premium tread or S3H rear highway traction tread; With S4N Bridgestone S3B front all season tread) (N/A with Michelin)
- Rear tire tread, premium highway- Rear wheel drive
- Rear wheels, 22.5" x 7.5" (58.9 cm x 19 cm), steel disc Accuride 10-hole, flange nut, hub piloted, 11.25" (28.5 cm) bolt circle, painted Gray (E-Coat) 26,440 lbs. (11,993 kg) capacity, (Requires HPK, HD1 single speed rear axle or HPM two-speed rear axle) (Requires 22.5" tires)
- Road Speed Governor, controlled by the speed rating of the tires ordered. All vehicles with 19.5" tire sizes and with most 22.5" tires have speed governed to a maximum of 75 mph (120 kph). A few aggressive tire tread patterns may have lower maximum speed ratings that limit governed speed to 65 or 55 mph - see tire companys specifications for details.
- TranSynd synthetic automatic transmission fluid (Available with automatic transmissions only)
- Transmission, automatic, Allison 2300 (Close Ratio) Series 5-speed with 4th Generation Electronic Controls and 0.71 overdrive. Torque rating: 450 lb-ft (610 N-m), 33,000 lbs. (15,000 kg) maximum GVWR/GCWR. Includes transmission oil cooler in radiator, increased cooling and column shift. No Parking pawl available. Transmission does not include internal power-take-off gear unless option PTO is specified. With Option PTX, the truck will be equipped with the Allison 2300HS Highway Series transmission. When ordered with option PTO, the truck will be equipped with the Allison 2300RDS Rugged Duty Series transmission. (Requires LRZ gasoline engine and HD1 or HPK rear axles)
- Truck application NOTE: Trucks that are used primarily to tow a trailer may be liable to Federal Excise Tax (FET) - check with IRS for guidelines
- Underhood air cleaner restriction gauge
- Wheelbase, 194" (492.8 cm) with 84" (213.4 cm) CA and 153.7" (390.4 cm) CE (With Post 2007i emission diesel engines, N/A with NPT exhaust)

RACOR FRAME-MOUNTED SPIN-ON TYPE with sight bowl, drain, and paper element. Includes water-in-fuel telltale dash light	\$16	
RATES GVWR AT 25,950 LBS. (11,736 KG) CAPAC	ITY	
VERY DARK PEWTER		
CRUISE CONTROL	\$52	
SMOKERS PACKAGE -cigarette lighter/muffin ashtray located on center console	\$20	
TILT-WHEEL ADJUSTABLE STEERING	\$173	
HIGH-BACK BUCKET, FIXED HEIGHT, MANUAL BA ADJUSTER	ACK ANGLE	
POWER CONVENIENCE PACKAGE -includes power door locks, power windows, and a tweeter speaker in each front door	\$482	
ELECTRONIC ACTIVATION SWITCH, (ELECTRIC HAND		
THROTTLE), IP MOUNTED (Includes K34 cruise control)	\$215	
CUSTOM/BASE MODEL		
DELCO AM-FM STEREO RADIO -with coaxial speakers in all door panels	\$135	
REAR STABILIZER BAR	\$177	
MULTI-LEAF, 21,000 LBS. (9525 KG) CAPACITY	\$61	
295/75R22.5G-22,700 LBS. (10,300 KG) CAPACITY	\$460	
22.5" X 8.25" (58.9 CM X 21 CM), STEEL DISC		
CLOTH SEAT TRIM	\$40	
DANA 19060S, 19,000 LBS. (8618 KG) CAPACITY	\$203	
FRONT TOW HOOKS, FRAME-MOUNTED	\$51	

REAR LIMITED SLIP DIFFERENTIAL

\$750

TRANSYND SYNTHETIC AUTOMATIC TRANSMISSION FLUID

TRUCK APPLICATION

194" (492.8 CM) -with 84" (213.4 cm) CA and 153.7" (390.4 cm) CE

**Option Packages Total** 

\$17,900

Kuhn Truck and RV


Kuhn Truck and RV

View this car on our website at truckandrv.com/6099160

Website: truckandrv.com

Phone: 419-899-2020

## Map: 240 OH-18, Sherwood, Ohio 43556

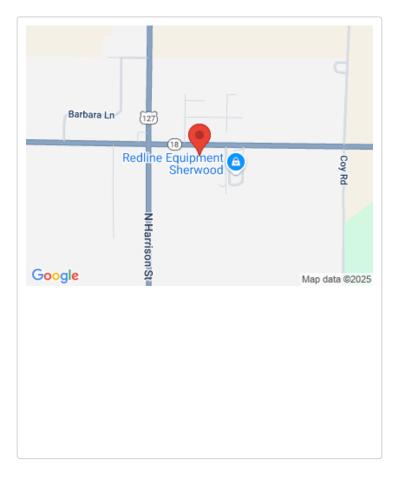

© 2025 AutoRevo - All rights reserved. - Powered by AutoRevo