

2005 CHEVROLET C4500 KODIAK MONROE HAULER 6.6L DIESEL 62K MILES MINT

View this car on our website at njtruckking.com/6430086/ebrochure



Our Price **\$44,900**

Specifications:

Year:	2005
VIN:	1GBE4E12X5F526538
Make:	CHEVROLET C4500 KODIAK
Model/Trim:	MONROE HAULER 6.6L DIESEL 62K MILES MINT
Condition:	Pre-Owned
Body:	Pickup Truck
Exterior:	Blue
Engine:	DURAMAX DIESEL 6600, 300 HP (223 KW) @ 3000 RPM, 520 LB-FT (702 N-M) TORQUE @ 1600 RPM
Interior:	Gray
Mileage:	62,387
Drivetrain:	Rear Wheel Drive

~~ULTRA RARE PRE-EMISSION HAULER WITH EXTREMELY LOW MILES

ONE OF A KIND

2005 CHEVROLET C4500 CREW CAB HAULER

~MONROE CONVERSION~

6.6L DURAMAX TURBO DIESEL

ALLISON AUTOMATIC TRANSMISSION

(62,387 ORIGINAL / ACTUAL MILES)

2-OWNER

CLEAN CARFAX

NON SMOKER

GARAGE KEPT

100% RUST FREE TRUCK !

METICULOUSLY MAINTAINED

BEST COLOR COMBO VERY RARE

2 SETS OF KEYS

ORIGINAL FLOOR MATS



CHEVROLET EQUIPMENT

ORIGINAL OWNER MANUAL

ALL THE OPTIONS !

AIR RIDE TRUCK

FOLD DOWN REAR SEAT BED

GOOSENECK SETUP

DUAL TANKS

EXHAUST BRAKE

TRAILER BRAKE CONTROLLER

TINTED GLASS

LED LIGHTS

TO MUCH TO LIST!

GOOD YEAR TIRES LIKE NEW !!

THIS TRUCK IS IN MINT CONDITION !

ONE SMALL DING BY THE TAIL GATE HANDLE

YOU WILL NOT FIND A NICER USED HAULER ANYWHERE!

WHY SPEND 100K PLUS ON A NEW TRUCK WHEN YOU CAN OWN THIS ONE FOR HALF AND IT WILL LAST LONGER THEN ANY OF THE NEW TRUCKS OUT TODAY ! PRE-EMISSION DIESEL ! NO DEF FLUID ! NO CDL REQUIRED !

WILL NOT LAST !

BEST OF THE BEST

DON'T SNOOZE AND LOSE BECAUSE YOU WILL NOT FIND ANOTHER LIKE IT !


PRE-EMISSION DURAMAX DIESEL

\$49,900

2005 CHEVROLET C4500 KODIAK MONROE HAULER 6.6L DIESEL 62K MILES MINT

King of Cars and Trucks - 856-693-3181 - View this car on our website at njtruckking.com/6430086/ebrochure

Our Location :

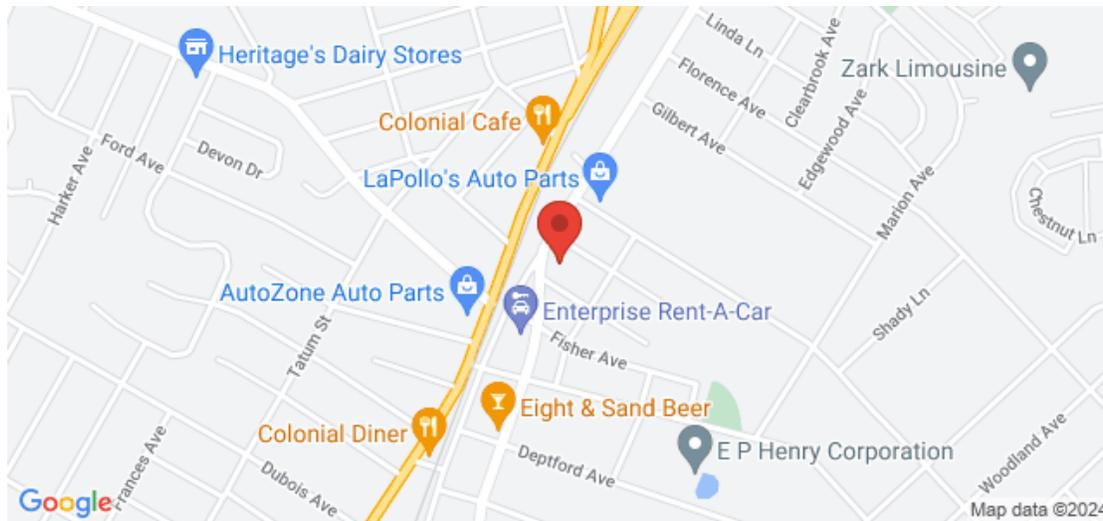

2005 CHEVROLET C4500 KODIAK MONROE HAULER 6.6L DIESEL 62K MILES MINT

King of Cars and Trucks - 856-693-3181 - View this car on our website at njtruckking.com/6430086/ebrochure

Installed Options

Interior

- Powerpoints - one in-cab power source (in addition to optional cigarette lighter) for electrical plug-in accessories
- Radio, Delco AM-FM stereo radio - with coaxial speakers in all door panels
- Seat trim, vinyl, Very Dark Pewter
- Seat, driver, high-back bucket, Fixed height, manual adjuster - storage in the seat riser with a small lip at the front to stop contents from sliding out
- Seat, passenger, high-back bucket, Fixed height, manual back angle adjuster - storage in the seat riser with a small lip at the front to stop contents from sliding out
- Underhood bodybuilder connections accessory power supply - Provides 12V power supply from the battery with two separate 30 amp fused circuits
- Air conditioning not desired - this option should be ordered only when a customer does not require air conditioning
- Cloth headliner- Coat hooks (2) located on cab back panel - Electronic engine hour meter
- Engine "Check Gauges" telltale light and buzzer, oil pressure gauge
- Gauges, low oil pressure and coolant level, high coolant and engine oil temperature
- Headlamp warning buzzer
- Interior trim, Very Dark Pewter (Requires 69V Very Dark Pewter Vinyl) or 69C Very Dark Pewter Cloth)
- Molded vinyl floor covering- Rear bench seat- Seat belt warning indicator
- Steering wheel, simulated leather- Steering, power - ZF variable ratio power
- Sunshades, passenger side and driver side, vinyl-covered
- Tachometer with automatic and manual transmissions
- Trim console - located next to driver's seat, and two cupholder
- Vinyl door trim panels - with storage pocket on front doors, beverage holders, and reflector on all doors
- Warning tone, key-in-ignition

Exterior

- Daytime running lights

Option Packages

Factory Installed Packages

DURAMAX DIESEL 6600, 300 HP (223 KW) @ 3000 RPM, 520 LB-FT (702 N-M) TORQUE @ 1600 RPM
(Includes KPJ Engine shutdown) \$6,946

Option Packages Total \$6,946

- Bumper, front, steel, 96" (243.8 cm) wide - styled to minimize wall to wall turn diameter painted argent
- Exterior roof drip moldings
- Integral grille and fenders - The grille is the same color as hood with single halogen headlamps.
- Mirror, manual, 102" (259 cm) wide load, integral arm, integral convex mirror - black molded composite 12" x 7" (30.5 cm x 17.8 cm) with 6" x 7" (15.2 cm x 17.8 cm) convex section
- Paint scheme, solid, lower color, Summit White
- Paint scheme, solid, upper color, Summit White
- Provisions for mounting front license plate- Steps under cab doors
- Windows, Solar-Ray tinted - front windows only; excluding rearside and rear windows
- Windshield wipers, intermittent, with pulse washers

Safety

- Powerpoints - one in-cab power source (in addition to optional cigarette lighter) for electrical plug-in accessories
- Radio, Delco AM-FM stereo radio - with coaxial speakers in all door panels
- Seat trim, vinyl, Very Dark Pewter
- Seat, driver, high-back bucket, Fixed height, manual adjuster - storage in the seat riser with a small lip at the front to stop contents from sliding out
- Seat, passenger, high-back bucket, Fixed height, manual back angle adjuster - storage in the seat riser with a small lip at the front to stop contents from sliding out
- Underhood bodybuilder connections accessory power supply - Provides 12V power supply from the battery with two separate 30 amp fused circuits
- Air conditioning not desired - this option should be ordered only when a customer does not require air conditioning
- Cloth headliner- Coat hooks (2) located on cab back panel - Electronic engine hour meter
- Engine "Check Gauges" telltale light and buzzer, oil pressure gauge
- Gauges, low oil pressure and coolant level, high coolant and engine oil temperature
- Headlamp warning buzzer
- Interior trim, Very Dark Pewter (Requires 69V Very Dark Pewter Vinyl or 69C Very Dark Pewter Cloth)
- Molded vinyl floor covering- Rear bench seat- Seat belt warning indicator
- Steering wheel, simulated leather- Steering, power - ZF variable ratio power
- Sunshades, passenger side and driver side, vinyl-covered
- Tachometer with automatic and manual transmissions
- Trim console - located next to driver's seat, and two cupholder
- Vinyl door trim panels - with storage pocket on front doors, beverage holders, and reflector on all doors
- Warning tone, key-in-ignition

Mechanical

- Brakes, front, power, 4-wheel disc, 4 channel ABS 4-piston - (See Front Axle options for more detail)
- Brakes, rear, power, 4-wheel disc, 4 channel ABS 2-piston - (See Rear Axle options for more detail)
- Engine, Vortec 8100MD gasoline V8, 225 hp (167 kw) @ 3600 rpm and 350 lb-ft torque (473 N-m) @ 1,200 rpm. - Maximum engine speed 5000 rpm
- Front tire size, 225/70R19.5F - 7280 lbs. (3802 kg) capacity, (With R4A Goodyear or R4L Michelin, requires R3C front premium highway tread; with R4N Bridgestone requires R3M front all season tread)
- Front wheels, 19.5" x 6.75" (49.5 cm x 17.1 cm), steel disc - 8-hole, 10,000 lbs. (4536 kg) capacity, (Requires Q83 steel rear wheel)
- Rear wheels, 19.5" x 6.75" (49.5 cm x 17.1 cm), steel disc - 8-hole, 20,000 lbs. (9072 kg) capacity, (Requires Q82 steel front wheel)
- Transmission, Allison 1000 Series automatic - with 0.71 overdrive. Torque Rating: 520 lb-ft (705 N-m). Column shift. Base model does not include power take-off gear. To include PTO gear please order with RPO "PTO". Includes transmission-oil cooler located inside radiator and an air-to-oil auxiliary cooler. PTO mounting location on the driver's side. With Option PTX, the truck will be equipped with the Allison 1000HS Highway Series transmission. When ordered with option PTO, the truck will be equipped with the Allison 1000RDS Rugged Duty Series transmission.
- Air cleaner, dry type
- Alternator, AD230 Delco Remy 105-amp maximum (N/A with YW2 wrecker package)
- Battery, single 600CCA Delphi Freedom 12V - 115-minute reserve capacity @ 27 degrees C, 600 CCA @ -18 degrees C grounded directly to starter, (Requires LQR gasoline engine) (N/A with YW2 wrecker packages)
- Cooling, anti-freeze protection temperature - -40 degrees F (-40 degrees C)
- Exhaust, single horizontal - passenger side mounted inside frame rail, stainless-steel with gasoline engines, aluminized steel with diesel engines
- Frame, 8mm - 80,000 psi (551,600 kPa) yield strength, steel frame, RBM: 610,400 Section Modulus 7.63
- Front axle, 7000 lbs. (3175 kg) capacity - I-beam Wide-trac. Up to 53 degree turn angle, (Includes 4-piston brake apply calipers)
- Front shock absorber, diameter 1.375" (35mm)
- Front stabilizer bar, 2" x 2" square tube (5 cm x 5 cm)
- Front suspension, tapered leaf, 7000 lbs. (3175 kg) capacity (includes stabilizer)

- Front tire manufacturer code, Goodyear (Requires S4A Goodyear)
- Front tread, premium, highway (Requires R4A Goodyear or R4L Michelin)
- Fuel sender assembly. Robust fuel pump
- Fuel tank, single, 40-gallon (151L) fuel capacity - gas or diesel, located behind rear axle with fuel fill neck through frame rail, DRIVER SIDE FILL NECK ONLY. NO AUXILIARY FUEL PORTS (N/A with YW2 Wrecker Package) MINIMUM OVERHANG = 60" (5 FEET)
- GVWR, 16,500 lbs. (7484 kg) capacity - GCWR limited to 24,000 lb. (10,866 kg)
- Option PTO not required - This option should only be ordered when a customer specifically does not require an electric hand throttle for use with power-take-off provisions. (Note: may delete transmission PTO gear.)
- Parking brake, hand lever operated transmission mounted drum brake
- Rear axle ratio, 5.13:1 - Not recommended for most applications, (Requires gasoline engines only)
- Rear axle, single speed, 11,000 lbs. (4990 kg) capacity - full floating, Includes 2-piston brake applied calipers
- Rear shock absorber, 1.375" (35mm)
- Rear stabilizer bar, provides increased load stabilization - improves handling and reduces vehicle roll. Does not adversely affect ride. Diameter 44mm, (Required with taper leaf springs) (Available with multi leaf springs)
- Rear suspension, tapered leaf, 11,000 lbs. (4990 kg) capacity (Requires GN1 rear stabilizer bar)
- Rear tire manufacturer code, Goodyear (Requires R4A Goodyear)
- Rear tire size, 225/70R19.5F - 13,660 lbs. (6196 kg) capacity, (With S4A Goodyear, requires S3C rear premium highway tread or S3H rear traction tread; with S4L Michelin, requires S3C rear premium highway tread or S3J rear highway traction tread; with S4N Bridgestone requires S3M rear all season tread)
- Rear tread, premium, highway (Requires S4A Goodyear or S4L Michelin)
- Rear wheel drive
- Road speed governor, controlled by the speed rating of the tires ordered which will be less than or equal to 85 mph (137 kph)
- Tethered fuel cap
- Wheelbase, 169" (429.3 cm) - with 60" (152.4) CA and 121" (307.3 cm) CE. Includes a 8 mm 80,000 psi (551,600 kPa) yield strength, steel frame, RBM: 824,800 section Modulus 10.31

King of Cars and Trucks

njtruckking.com

856-693-3181

1229 Broadway

Westville, New Jersey 08093

© 2024 AutoRevo - All rights reserved. - Powered by AutoRevo