

2007 GMC C6500

View this car on our website at pinetreemotors.com/6944795/ebrochure



Our Price **\$24,900**

Specifications:


Year:	2007
VIN:	1GDJ6C1G47F401585
Make:	GMC
Stock:	7F401585
Model/Trim:	C6500
Condition:	Pre-Owned
Body:	Pickup Truck
Exterior:	Summit White
Engine:	Engine, Vortec 8.1L MD gasoline V8, 295 hp (220 kw) @ 3600 rpm and 440 lb-ft (594 N-m) torque @ 3,200 rpm - Maximum engine speed 4000 rpm with KZX air compressor and 4,200 rpm without KZX. Oil Level Sensor: Warning sensor for low oil levels
Interior:	Very Dark Pewter Cloth
Mileage:	40,656
Drivetrain:	Rear Wheel Drive

24 FT BOX - LOW MILES - WARRANTY - SERVICED - READY TO WORK ! THIS TRUCK IS A 2007 GMC C6500 BOX TRUCK - 8.1L V8 GAS - AUTOMATIC TRANSMISSION - POWER HEATED MIRRORS - TILT STEERING - CRUISE CONTROL - AM-FM RADIO - BACK UP CAMERA - CLOTH SEATS - RUBBER FLOOR MAT - 24 FT SUPREME BOX - REAR ROLL DOOR - 25,950 GVWR - ONLY 40,656 MILES - SERVICED - PENNSYLVANIA STATE INSPECTED - RUNS & DRIVES GREAT ! MANY COMMERCIAL VEHICLES IN STOCK AND READY TO WORK ! SERVING THE WORKFORCE FOR OVER 40 YEARS - OUR FAMILY DOES WHAT WORKS FOR YOU ! CALL US AT 717-738-2242 VISIT OUR WEBSITE www.pinetreemotors.com OR STOP IN TODAY !!

2007 GMC C6500

Pine Tree Motors - (717) 738-2242 - View this car on our website at pinetreemotors.com/6944795/ebrochure

Our Location :

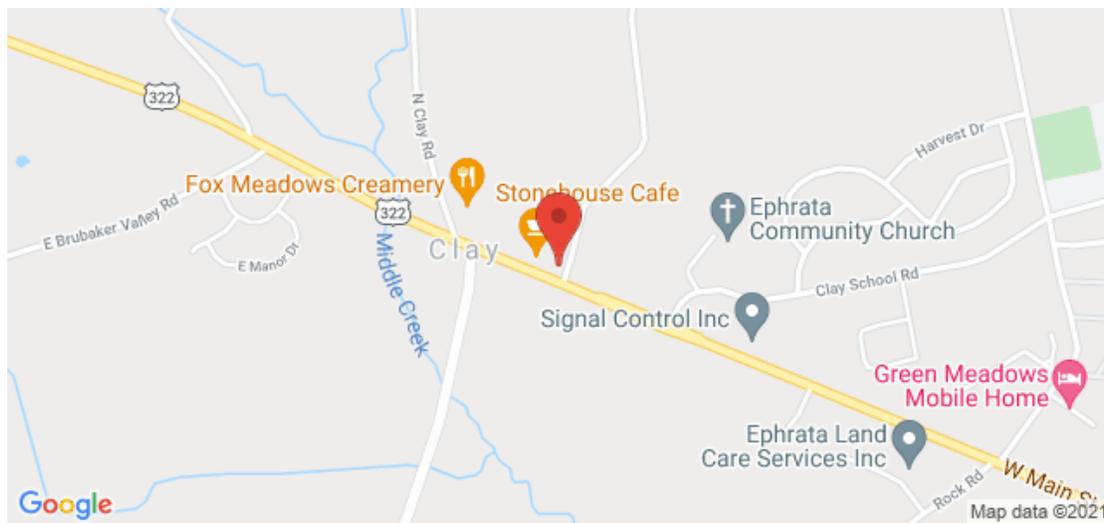

2007 GMC C6500

Pine Tree Motors - (717) 738-2242 - View this car on our website at pinetreemotors.com/6944795/ebrochure

Installed Options

Interior

- Air conditioning not desired - this option should be ordered only when a customer does not require air conditioning
- Electronic engine hour meter
- Engine "Check gauges" telltale light and buzzer, oil pressure gauge
- Gauges, low oil pressure and coolant level, high coolant and engine oil temperature
- Headlamp warning buzzer
- Interior trim, Very Dark Pewter (Requires 69V Very Dark Pewter Vinyl or 69C Very Dark Pewter Cloth)
- Molded vinyl floor covering
- Powerpoints - two in-cab power sources (in addition to optional cigarette lighter) for electrical plug-in accessories
- Provisions for stereo - Includes AM/FM antenna, lead wiring for speakers, and separate door chime module (N/A with ZQ2 driver convenience package)
- Seat trim, vinyl, Very Dark Pewter
- Seat, driver, High-back bucket, Fixed height, manual adjuster - storage in the seat riser with a small lip at the front to help prevent contents from sliding out
- Seat, passenger, High-back bucket, Fixed height, manual back angle adjuster - storage in the seat riser with a small lip at the front to stop contents from sliding out
- Steering, power - ZF variable ratio power
- Stepwell storage areas at each door. Includes storage cover
- Sunshades, passenger side and driver side, vinyl-covered
- Tachometer with automatic and manual transmissions
- Two sided single common key for doors and ignition
- Underhood bodybuilder connections accessory power supply - Provides 12V power supply from the battery with two separate 30 amp fused circuits
- Vinyl door trim panels - with storage pockets, beverage holders, and reflectors

Exterior

- Bumpers, front steel, painted argent - Bumper thickness 3.9 mm - Daytime running lamps

- Exterior roof drip moldings- Front mud flaps
- Horn, single electric mounted inside engine compartment
- Integral grille and fenders - The grille is the same color as hood with single halogen headlamps. Entry steps under cab doors are based upon fuel tank type
- Mirror, manual, 102" (259 cm) wide load, integral arm, integral convex mirror - black molded composite 12" x 7" (30.5cm x 17.8 cm) with 6" x 7" (15.2cm x 17.8cm) convex section
- Paint, solid, lower color, Summit White- Paint, solid, upper color, Summit White
- Positive door stops- Provisions for mounting front license plate- Roof marker lamps
- Windows, Solar-Ray tinted - all windows
- Windshield wipers, 2-speed and intermittent, with pulse washers

Safety

- Air conditioning not desired - this option should be ordered only when a customer does not require air conditioning
- Electronic engine hour meter
- Engine "Check gauges" telltale light and buzzer, oil pressure gauge
- Gauges, low oil pressure and coolant level, high coolant and engine oil temperature
- Headlamp warning buzzer
- Interior trim, Very Dark Pewter (Requires 69V Very Dark Pewter Vinyl or 69C Very Dark Pewter Cloth)
- Molded vinyl floor covering
- Powerpoints - two in-cab power sources (in addition to optional cigarette lighter) for electrical plug-in accessories
- Provisions for stereo - Includes AM/FM antenna, lead wiring for speakers, and separate door chime module (N/A with ZQ2 driver convenience package)
- Seat trim, vinyl, Very Dark Pewter
- Seat, driver, High-back bucket, Fixed height, manual adjuster - storage in the seat riser with a small lip at the front to help prevent contents from sliding out
- Seat, passenger, High-back bucket, Fixed height, manual back angle adjuster - storage in the seat riser with a small lip at the front to stop contents from sliding out
- Steering, power - ZF variable ratio power
- Stepwell storage areas at each door. Includes storage cover
- Sunshades, passenger side and driver side, vinyl-covered
- Tachometer with automatic and manual transmissions
- Two sided single common key for doors and ignition
- Underhood bodybuilder connections accessory power supply - Provides 12V power supply from the battery with two separate 30 amp fused circuits
- Vinyl door trim panels - with storage pockets, beverage holders, and reflectors

Mechanical

- Air cleaner, dry-type standard filter element (Gasoline engines only)
- Alternator, AD244, Delco-Remy 150-amp maximum (Requires gasoline engine)
- Battery, single, 600 CCA, Delphi Freedom 12V. - 115-minute reserve capacity @ 27 degrees C, 600 CCA @ -18 degrees C, (Gasoline engines only)
- Brake system, hydraulic, split - with 4-channel ABS disc-type Bosch Hydro Max high performance booster, tandem master cylinder provides independent front and rear circuits, front and rear disc Meritor calipers: 15 3/8" (391mm) rotor diameter, 1 1/2" (39.1 mm) rotor thickness with (4) 2 1/2" (64 mm) diameter pistons with 8,000 lb. (3629 kg) front axle, (70 mm) diameter pistons with 10,000 lb. (4536 kg) front axle
- Engine, Vortec 8.1L MD gasoline V8, 295 hp (220 kw) @ 3600 rpm and 440 lb-ft (594 N-m) torque @ 3,200 rpm - Maximum engine speed 4000 rpm with KZX air compressor and 4,200 rpm without KZX. Oil Level Sensor: Warning sensor for low oil levels
- Exhaust system, single horizontal - driver side mounted inside frame rail, With Gasoline engines, stainless-steel exhaust. With diesel engines, aluminized steel exhaust, oxidation catalyst, diesel particulate filter and exhaust gas cooler.
- Frame, painted semi-gloss black 6mm rail - 50,000 psi (344,750 kPa) yield strength, steel frame, SAE J1392-050XLK steel, dimensions 9 1/2" x 3" x 1/4" section modulus 9.58 cu. in., RBM 479,000
- Front axle, 8000 lbs. (3629 kg) capacity - Up to 53 degree turn angle
- Front shock absorber, diameter 1.375" (35mm)
- Front suspension, tapered leaf, 8000 lbs. (3629 kg) capacity (Requires FM8 front axle)
- Front tire manufacturer code, Goodyear (Requires S4A Goodyear)
- Front tire size, 245/75R22.5G - 9350 lbs. (4241 kg) capacity, (With R4A Goodyear, R3C rear premium tread; With R4N Bridgestone R3B front all season tread) (N/A with Michelin)
- Front tire tread, premium highway
- Front wheels, 22.5" x 7.5" (58.9 cm x 19 cm), steel disc - Accuride 10-hole, flange nut, hub piloted, 11.25" (28.5 cm) bolt circle, painted Gray (E- Coat), 13,220 lbs. (5996 kg) capacity, (Requires QH4 rear wheel)
- Fuel tank, single, 50-gallon (189.2L) fuel capacity - driver side, steel top tread plate, sump, drain and steps under cab on front passenger side. Provides clean back of cab and a black tethered fuel cap with gasoline engines, and a brass tethered fuel cap with diesel engines (N/A with GPG Lo-Pro option) (Requires QH4, RPR or RNN 22.5" wheels)
- Option PTO not required - This option should only be ordered when a customer specifically does not require an electric hand throttle for use with power-take-off provisions. (Note: Deletes transmission PTO gear with Allison MTX 2200HS, MTY 2300HS, and MWP 2500HS Series transmissions.)
- Parking brake, hand lever operated transmission mounted drum brake

- Rear axle ratio, 6.50:1 (Requires HD1 or HPK single speed rear axle)
- Rear axle, single-speed, Dana S16-130-S, 15,000 lbs. (6804 kg) capacity - 40,000 lbs. (18,144 kg) GCWR
- Rear suspension, multi-leaf, 15,000 lbs. (6804 kg) capacity (Requires HD1 single speed rear axle)
- Rear tire manufacturer code, Goodyear (Requires R4A Goodyear)
- Rear tire size, 245/75R22.5G - 17,640 lbs. (8001 kg) capacity (With S4A Goodyear, S3C rear premium tread or S3H rear highway traction tread; With S4N Bridgestone S3B front all season tread) (N/A with Michelin)
- Rear tire tread, premium highway- Rear wheel drive
- Rear wheels, 22.5" x 7.5" (58.9 cm x 19 cm), steel disc - Accuride 10-hole, flange nut, hub piloted, 11.25" (28.5 cm) bolt circle, painted Gray (E-Coat) 26,440 lbs. (11,993 kg) capacity, (Requires HPK, HD1 single speed rear axle or HPM two-speed rear axle) (Requires 22.5" tires)
- Road Speed Governor, controlled by the speed rating of the tires ordered. All vehicles with 19.5" tire sizes and with most 22.5" tires have speed governed to a maximum of 75 mph (120 kph). A few aggressive tire tread patterns may have lower maximum speed ratings that limit governed speed to 65 or 55 mph - see tire company's specifications for details.
- TransSynd synthetic automatic transmission fluid (Available with automatic transmissions only)
- Transmission, automatic, Allison 2300 (Close Ratio) Series 5-speed - with 4th Generation Electronic Controls and 0.71 overdrive. Torque rating: 450 lb-ft (610 N-m), 33,000 lbs. (15,000 kg) maximum GVWR/GCWR. Includes transmission oil cooler in radiator, increased cooling and column shift. No Parking pawl available. Transmission does not include internal power-take-off gear unless option PTO is specified. With Option PTX, the truck will be equipped with the Allison 2300HS Highway Series transmission. When ordered with option PTO, the truck will be equipped with the Allison 2300RDS Rugged Duty Series transmission. (Requires LRZ gasoline engine and HD1 or HPK rear axles)
- Truck application NOTE: Trucks that are used primarily to tow a trailer may be liable to Federal Excise Tax (FET) - check with IRS for guidelines
- Underhood air cleaner restriction gauge
- Wheelbase, 128" (325.1 cm) - with 60" (152.4 cm) CA and 135.3" (343.7 cm) CE. Includes a 6 mm 50,000 psi (344,750 kPa) yield strength, steel frame, RBM: 479,000 Section Modulus 9.58 cu. in. (N/A with Post 2007i emission diesel engines)

Option Packages

Factory Installed Packages

VORTEC 8.1L MD GASOLINE V8, 295 HP
(220 KW) @ 3600 RPM, 440 LB-FT
(594N-M) TORQUE @ 3,200 RPM
Oil Level Sensor: Warning sensor
for low oil levels

RATES GVWR AT 25,950 LBS. (11,736
KG) CAPACITY

VERY DARK PEWTER



pinetreemotors.com

(717) 738-2242

2407 W Main St

Ephrata, PA 17522

© 2021 AutoRevo - All rights reserved. - Powered by AutoRevo