

2006 GMC TC4500


View this car on our website at autolandoutlets.com/7101129/ebrochure



Our Price **\$19,946**

Specifications:

Year:	2006
VIN:	1GDE4C1G56F423827
Make:	GMC
Stock:	11240
Model/Trim:	TC4500
Condition:	Pre-Owned
Body:	Pickup Truck
Exterior:	Summit White
Engine:	VORTEC 8100 MD GASOLINE V8, 325 HP (239 KW) @ 4000 RPM AND 450 LB-FT TORQUE (610 N-M) @ 2,800 RPM.
Interior:	Gray Cloth
Transmission:	AUTOMATIC, ALLISON 1000 SERIES
Mileage:	76,953
Drivetrain:	Rear Wheel Drive

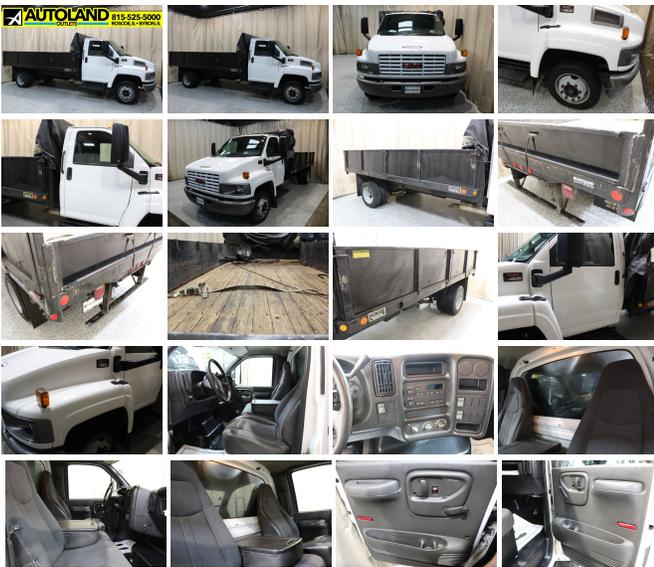

Many of our trucks are Rust Free Southern Units!!! We Buy-Sell-Trade call us for Availability and Pricing 815-525-5000. Dealer Shall in no way be held liable for any errors or omissions to be found on these webpages. All prices are plus any applicable state taxes and service fees. We will do our best to keep all the information current and accurate, however the dealership should be contacted for final pricing and availability. Autoland Outlets is the midwest Premier Truck Store. Over 250 Trucks in Stock!! Over 150 are Diesels! 3/4 Tons, 1 Tons, Regular, Extended and Crew Cabs. Plus: Dump Trucks, Utility Trucks, and much more! Many New Trucks Arriving Daily!!! Thousands of Satisfied Customers! Over 25 Years in Business. Updated Daily 888-240-8674 ILLINOIS WARRANTY MAY APPLY CALL DEALERSHIP FOR DETAILS

2006 GMC TC4500

Autoland Outlets - 877-319-6060 - View this car on our website at autolandoutlets.com/7101129/ebrochure

Our Location :



2006 GMC TC4500

Autoland Outlets - 877-319-6060 - View this car on our website at autolandoutlets.com/7101129/ebrochure

Installed Options

Interior

- Air conditioning not desired - this option should be ordered only when a customer does not require air conditioning
- Cloth headliner- Coat hooks (2) located on cab back panel - Electronic engine hour meter
- Engine "Check Gauges" telltale light and buzzer, oil pressure gauge
- Gauges, low oil pressure and coolant level, high coolant and engine oil temperature
- Headlamp warning buzzer
- Interior trim, Very Dark Pewter (Requires 69V Very Dark Pewter Vinyl or 69C Very Dark Pewter Cloth)
- Molded vinyl floor covering
- Powerpoints - one in-cab power source (in addition to optional cigarette lighter) for electrical plug-in accessories
- Provisions for stereo - Includes AM/FM antenna, lead wiring for speakers, and separate door chime module, (N/A with ZQ2 driver convenience package)
- Seat belt warning indicator- Seat trim, vinyl, Very Dark Pewter
- Seat, driver, high-back bucket, Fixed height, manual adjuster - storage in the seat riser with a small lip at the front to stop contents from sliding out
- Seat, passenger, high-back bucket, Fixed height, manual back angle adjuster - storage in the seat riser with a small lip at the front to stop contents from sliding out
- Steering wheel, simulated leather- Steering, power - ZF variable ratio power
- Sunshades, passenger side and driver side, vinyl-covered
- Tachometer with automatic and manual transmissions
- Trim console - located next to driver's seat, and two cupholder
- Underhood bodybuilder connections accessory power supply - Provides 12V power supply from the battery with two separate 30 amp fused circuits
- Vinyl door trim panels - with storage pocket on front doors, beverage holders, and reflector on all doors
- Warning tone, key-in-ignition

Exterior

- Bumper, front, steel, 96" (243.8 cm) wide - styled to minimized wall to wall turn diameter

painted argent

- Daytime running lamps- Exterior roof drip moldings
- Integral grille and fenders - The grille is the same color as hood with single halogen headlamps.
- Mirror, manual, 102" (259 cm) wide load, integral arm, integral convex mirror - black molded composite 12" x 7" (30.5 cm x 17.8 cm) with 6" x 7" (15.2 cm x 17.8 cm) convex section
- Paint scheme, solid, lower color, Summit White
- Paint scheme, solid, upper color, Summit White
- Provisions for mounting front license plate- Steps under cab doors
- Windows, Solar-Ray tinted - all windows
- Windshield wipers, 2-speed and intermittent, with pulse washers

Safety

- Air conditioning not desired - this option should be ordered only when a customer does not require air conditioning
- Cloth headliner- Coat hooks (2) located on cab back panel - Electronic engine hour meter
- Engine "Check Gauges" telltale light and buzzer, oil pressure gauge
- Gauges, low oil pressure and coolant level, high coolant and engine oil temperature
- Headlamp warning buzzer
- Interior trim, Very Dark Pewter (Requires 69V Very Dark Pewter Vinyl or 69C Very Dark Pewter Cloth)
- Molded vinyl floor covering
- Powerpoints - one in-cab power source (in addition to optional cigarette lighter) for electrical plug-in accessories
- Provisions for stereo - Includes AM/FM antenna, lead wiring for speakers, and separate door chime module, (N/A with ZQ2 driver convenience package)
- Seat belt warning indicator- Seat trim, vinyl, Very Dark Pewter
- Seat, driver, high-back bucket, Fixed height, manual adjuster - storage in the seat riser with a small lip at the front to stop contents from sliding out
- Seat, passenger, high-back bucket, Fixed height, manual back angle adjuster - storage in the seat riser with a small lip at the front to stop contents from sliding out
- Steering wheel, simulated leather- Steering, power - ZF variable ratio power
- Sunshades, passenger side and driver side, vinyl-covered
- Tachometer with automatic and manual transmissions
- Trim console - located next to driver's seat, and two cupholder
- Underhood bodybuilder connections accessory power supply - Provides 12V power supply from the battery with two separate 30 amp fused circuits
- Vinyl door trim panels - with storage pocket on front doors, beverage holders, and reflector on all doors
- Warning tone, key-in-ignition

Mechanical

- Air cleaner, dry type
- Alternator, AD244 Delco-Remy 150-amp maximum (N/A with YW2 wrecker package)
- Battery, single 600 CCA Delphi Freedom 12V - 115-minute reserve capacity @ 27 degrees C, 600 CCA @ -18 degrees C grounded directly to starter. (Requires gasoline engine) (N/A with ANQ Snow Plow Prep package or YW2 Wrecker package)
- Brakes, front, power, 4-wheel disc, 4 channel ABS 2-piston - (See Front Axle options for more detail)
- Brakes, rear, power, 4-wheel disc, 4 channel ABS 2-piston - (See Rear Axle options for more detail)
- Cooling, anti-freeze protection temperature - -40 degrees F (-40 degrees C)
- Engine, Vortec 8100MD gasoline V8, 325 hp (239 kw) @ 4000 rpm and 450 lb-ft torque (610 N-m) @ 2,800 rpm. - Maximum engine speed 5000 rpm. Oil Level Sensor: Warning sensor for low oil levels
- Exhaust, single horizontal - passenger side mounted inside frame rail, stainless-steel with gasoline engines, aluminized steel with diesel engines
- Frame, 6mm - 80,000 psi (551,600 kPa) yield strength, steel frame, RBM: 610,400 Section Modulus 7.63
- Front axle, 6250 lbs. (2835 kg) capacity - I-beam Wide-trac. Up to 53 degree turn angle, (Includes 2-piston brake apply calipers) (Includes C7P 16,000 lbs. (7257 kg) GVWR)
- Front shock absorber, diameter 1.375" (35mm)
- Front stabilizer bar, 2" x 2" square tube (5 cm x 5 cm)
- Front suspension, tapered leaf, 7000 lbs. (3175 kg) capacity (includes stabilizer)
- Front tire manufacturer code, Goodyear (Requires S4A Goodyear)
- Front tire size, 225/70R19.5F - 7280 lbs. (3802 kg) capacity, (With R4A Goodyear or R4L Michelin, requires R3C front premium highway tread; with R4N Bridgestone requires R3M front all season tread)
- Front tread, premium, highway (Requires R4A Goodyear or R4L Michelin)
- Front wheels, 19.5" x 6.0" (49.5 cm x 15.2 cm), steel disc - 8-hole. 7280 lbs. (3302 kg) capacity
- Fuel sender assembly. Robust fuel pump
- Fuel tank, single, 25-gallon (95L) fuel capacity - gas or diesel located midship between the frame rails, with fuel fill neck through the frame rail (this option uses the mid-frame tank included in the NG6 dual tank option), (Required in YW2 Wrecker Package) (Standard on 60" (152.4 cm) CA), (Optional on all other CA's) MINIMUM OVERHANG = 36" (3 FEET)

- GVWR, 16,000 lbs. (7257 kg) capacity - GCWR limited to 24,000 lb. (10,866 kg) (Requires FR5 6250 lbs. (2835 kg) front axle) NOTE: Trucks that are used primarily to tow a trailer may be liable to Federal Excise Tax (FET) - check with IRS for guidelines
- Option PTO not required - This option should only be ordered when a customer specifically does not require an electric hand throttle for use with power-take-off provisions. (Note: may delete transmission PTO gear.)
- Parking brake, hand lever operated transmission mounted drum brake
- Rear axle ratio, 5.13:1 - Not recommended for most applications, (Requires gasoline engines only) (N/A with RPO (EC9) 128" wheelbase and ML6 manual transmission combination)
- Rear axle, single speed, 11,000 lbs. (4990 kg) capacity - full floating, Includes 2-piston brake applied calipers
- Rear shock absorber not desired (N/A with tapered leaf springs)
- Rear suspension, multi-leaf, 11,000 lbs. (4990 kg) capacity (Requires GL4 rear axle)
- Rear tire manufacturer code, Goodyear (Requires R4A Goodyear)
- Rear tire size, 225/70R19.5F - 13,660 lbs. (6196 kg) capacity, (With S4A Goodyear, requires S3C rear premium highway tread or S3H rear traction tread; with S4L Michelin, requires S3C rear premium highway tread or S3J rear highway traction tread; with S4N Bridgestone requires S3M rear all season tread)
- Rear tread, premium, highway (Requires S4A Goodyear or S4L Michelin)
- Rear wheel drive
- Rear wheels, 19.5" x 6.0" (49.5 cm x 15.2 cm), steel disc - 8-hole. 14,560 lbs (6604 kg) capacity
- Road speed governor, controlled by the speed rating of the tires ordered. - which will be less than or equal to 85 mph (137 kph); 80 mph (129 kph) with EC9 128" wheelbase/60" CA, ML6 manual transmission and 008 4.88 rear axle ratio; 75 mph (120 kph) with EC9 128" wheelbase/60" CA, M74 automatic transmission and HD2 rear axle
- Tethered fuel cap
- Transmission, Allison 1000 Series automatic - with 4th Generation Electronic Controls and 0.71 overdrive. Torque Rating: 620 lb-ft (840 N-m) with shift energy management. Column shift and Parking pawl. Base model does not include power take-off gear. To include PTO gear please order with RPO "PTO". PTO mounting location on the drivers side. Includes transmission-oil cooler located inside radiator. With Option PTX, the truck will be equipped with the Allison 1000HS Highway Series transmission. When ordered with option PTO, the truck will be equipped with the Allison 1000RDS Rugged Duty Series transmission. (N/A with RPO ANM Fire and Rescue Package or RPO YF2 Ambulance Package)
- Wheelbase, 128" (325.1 cm) - with 60" (152.4 cm) CA and 100" (254 cm) CE. Includes a 6 mm 80,000 psi (551,600 kPa) yield strength, steel frame, RBM: 610,400 Section Modulus 7.63 (Requires KYW 75 mph (120 kph) road speed governor with RPO options M74 automatic transmission and HD2 13,500 lbs. (6123 kg) capacity rear axle)

Option Packages

Factory Installed Packages

VORTEC 8100 MD GASOLINE V8, 325 HP (239 KW) @ 4000 RPM AND 450 LB-FT TORQUE (610 N-M) @ 2,800 RPM.

Oil Level Sensor: Warning sensor for low oil levels

AUTOMATIC, ALLISON 1000 SERIES

-with 4th Generation Electronic Controls and 0.71 overdrive. Torque Rating: 620 lb-ft (840 N-m) with shift energy management. Column shift and Parking pawl.

Autoland Outlets
autolandoutlets.com
 877-319-6060
 13156 Love Rd
 Roscoe, IL 61073

© 2022 AutoRevo - All rights reserved. - Powered by AutoRevo